#### p-ISSN: 2614-8897 DOI: 10.33387/jiko.v7i1.7743 e-ISSN: 2656-1948

ARTIFICIAL NEURAL NETWORK MULTI-LAYER PERCEPTRON FOR

# DIAGNOSIS OF DIABETES MELLITUS

Ofelia Cizela da Costa Tavares<sup>1</sup>, Abdullah Z. Abidin<sup>2</sup>, Firman Tempola<sup>3</sup>

<sup>1</sup>Department of Computer Sciences, Dili Institute of Technology <sup>2</sup> Professional IT Consultant Enterprise at Malaysia <sup>3</sup> Department of Informatics, Universitas Khairun \*Email: 1 offytasyah 1803@gmail.com, 2 abdz.abidin@gmail.com 3 fhyr.tempola@gmail.com

(Received: 21 March 2024, Revised: 08 April 2024, Accepted: 18 April 2024)

## Abstract

Diabetes Mellitus is a disease caused by an unhealthy lifestyle, so blood sugar is not controlled, causing complications. This disease is one of the most dangerous diseases in the world. Approximately 422 million people worldwide have diabetes, the majority living in low- and middle-income countries, and 1.5 million deaths are caused by diabetes each year. The number of cases and prevalence of diabetes have continued to increase over the last few decades. Artificial Neural Networks are a part of machine learning that can solve various problems. One of them is in terms of disease diagnosis. MLP has the advantage that learning is done repeatedly to create a durable, consistent system that works well. This research aims to implement the Multi-Layer Perceptron Artificial Neural Network method for diagnosing diabetes mellitus and then evaluating the MLP by analyzing precision, recall, fl score, and calculating accuracy. Next, it is validated with k-fold cross-validation. In the experiment in this study, several scenarios were used, and the best scenario was obtained when using eight input layers, seven hidden layers, one output layer, and 5000 iterations. The experiment results showed that the multi-layer perceptron successfully classified diabetics and non-diabetics by percentage. Precision 77.24%, Recall 72.58%, F1 Score 76.86%, accuracy 75%, and average accuracy 78.01%.

**Keywords**: Backpropagation, Diabetes Mellitus, Multi-Layer Perceptron.

This is an open access article under the CC BY license.



\*Corresponding Author: Ofelia Cizela da Costa Tavares

# 1. INTRODUCTION

Diabetes mellitus is a chronic disease that causes up to 1.5 million deaths a year (WHO, 2023). This disease is synonymous with an unhealthy lifestyle; the amount of sugar and calorie intake that enters the body is not balanced with sufficient body activity, so sugar accumulates in the blood and becomes diabetes or what is more commonly called diabetes mellitus [1].

Various efforts have been made to reduce the rate of diabetes mellitus sufferers. One way is to carry out an initial diagnosis of diabetes mellitus. Of course, skilled health workers are needed for initial diagnosis, but more health workers in various countries are needed. However, the development of artificial intelligence has become a solution for the world of health. Various studies have been conducted to diagnose diabetes mellitus [2]-[5].

[2] Classified diabetes using the K-NN method. The data validation process has yet to be carried out in

this research. [3] uses the SVM method for the classification process, which is different from what will be done in this research, namely, using a multilayer perceptron. [4] uses several machine learning methods, but the type of data used is image data. Meanwhile, [5] compares the SVM and K-NN methods. The dataset used is different from the one used in this research, and the method used is also different.

This research will utilize a Neural Network machine learning algorithm. In artificial neural networks, various models can be applied. For this research, a multi-layer perceptron was used to diagnose diabetes mellitus. The use of MLP has been carried out by several other researchers on various types of objects and is considered reliable [6-10].

[6] utilized MLP for the classification of hypertension in adolescents in Malaysia. This system can classify hypertension well. [7] in the case of ceramic insulators. [8] in the case of fertility rates in

men. [9] diagnosed Alzheimer's disease, where the system was able to classify with 99.35% accuracy. Then [10] chronic kidney disease was classified with an accuracy rate of 92.5%. So, in this research, a multilayer perceptron will be used to classify diabetes in

In the proposed research, the evaluation process uses precision, recall, fl score, and accuracy calculation analysis. The aim is to determine the reliability of the multi-layer perceptron model in diagnosing diabetes mellitus. Then, validation will be carried out using k-fold cross-validation [11]. The validation process is carried out because validating the model's performance can be improved.

### RESEARCH METHOD

Multi-layer perceptron is part of an Artificial Neural Network (ANN). It consists of several neurons, and there are connections between these neurons. These neurons will transform the information received through their output connections to other neurons. In a multi-layer perceptron, this relationship is known as weight. This information is stored at a particular value or weight. In multi-layer perception uses the Backpropagation algorithm. The following are the steps of this research.

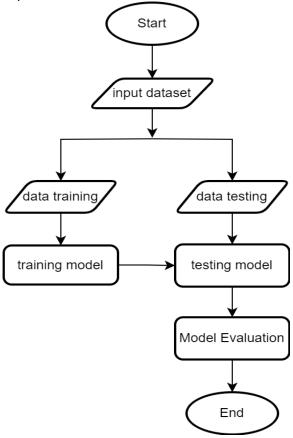


Figure 1. research steps.

## 2.1 Dataset

The type of data used in this research is secondary data. This data is data that comes from kaggle. This data has information about 768 female patients. The types of data are shown in Table 1.

Tabel 1. Lists of criteria

No	criteria	Unit
1	Number of times pregnant	-
2	Plasma glucose concentration	mg/dl
3	Diastolic blood pressure	mmhg
4	Triceps skin fold thickness	mm
5	2-Hour serum insulin	mu U/ml
6	Body mass index	$kg/m^2$
7	Diabetes pedigree function	-
8	Age	Years
9	Class	

# 2.2 Architecture backpropagation

In this research, the machine learning model used is the multi-layer perceptron. The steps for this model have been carried out by [12], which applies the backpropagation algorithm. In this research, testing was carried out using several scenarios, including initializing the hidden layer and increasing the number of iterations. Figure 2 illustrates the backpropagation architecture with input layer 8, hidden layer two, and output layer 1.

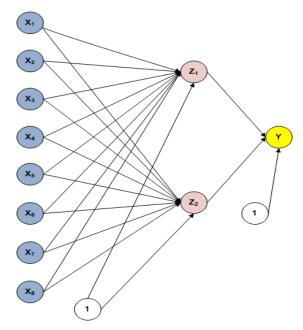


Figure 2. Architecture Backpropagation

## 2.3 Evaluation Model

A confusion matrix is used in research to evaluate the multi-layer perceptron model. The confusion matrix is a table that states the number of test data that are correctly classified and the number of test data that are incorrectly classified [13]. The table for the confusion matrix is shown in Table 2.

Table. 2 Confusion Matrix

		Class prediction	
		1	0
Real class	1	TP	FN
Real class	0	FP	TN

TP (True Positive), FP (False Positive), FN (False Negative), TN (True Negative).

After creating the confusion matrix table, the accuracy value is then calculated using Equation 1, then presisi using Equation 2, Recall using Equation 3, And f1 score using Equation 4 [14].

$$Accuracy = \frac{TP + TN}{TP + FN + FP + TN} \times 100\% \tag{1}$$

$$Precision = \frac{\sum TP}{\sum TP + \sum FP} \times 100\%$$
 (2)

$$Recall = \frac{\sum TP}{\sum TP + \sum FN} \times 100\%$$
 (3)

$$F1 - Score = 2 x \frac{precission x recall}{precisin + recall} \times 100\%$$
 (4)

Model validation will also be carried out using kfold cross-validation in the research. This is done so that all data has the same training and testing rights. Apart from that, in validation using k-fold crossvalidation, the accuracy value can increase [15].

# RESULT AND DISCUSSION

The dataset in this study was taken from Kaggle, which can be accessed openly via the following link: https://www.kaggle.com/datasets/akshaydattatraykhar e/diabetes-dataset. This data is divided into two categories: data with classes 0 and 1. The data distribution from each class is 500 for class 0 and 268 for class 1, as shown in Figure 3.

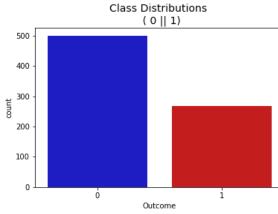


Figure 3. Distribution of class

## 3. 1 Experimental result

The research's experimental process consists of adding hidden layers and the number of iterations, with six trials. For dataset division, 80% training data and 20% test data. The testing process was also validated using k-fold cross-validation with 10-fold. The experimental results for the confusion matrix are shown in Figure 4, with the highest accuracy results. and all experiments are shown in Table 3.

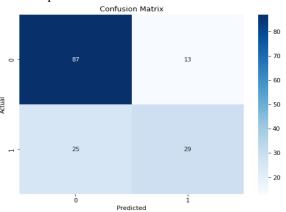


Figure 4. confusion matrix with the highest accuracy

Table 3. Experimental results

<b>N</b> T	TT' 1 1 1	•, ,•	
No	Hidden layer	iteration	accuracy
1	7	5000	75%
2	2	5000	73%
3	5	5000	71%
4	5	10000	71%
5	2	10000	73%
6	7	10000	75%

## **Determination of hidden layers**

In experiments on research into the classification of diabetes in women using a multi-layer perceptron, the process of determining hidden layers was carried out in 3 types, namely 2, 5, and 7. The experimental results show that initializing the hidden layer with the number 7 has excellent model performance. Where an accuracy value of 75% is obtained. Then, when validation was carried out using k-fold crossvalidation, the average accuracy value for hidden layer 7 obtained an accuracy value of 78.01%.

### **Determination of the number of iterations**

Apart from determining hidden layers, this research also tested by determining the number of iterations. There are two initializations for the number of iterations carried out in the classification of diabetes in women, namely 5000 and 10.000. Based on experimental results, especially for the dataset used in this research, determining the number of iterations does not affect the model's performance for diabetes classification.

# Results of precision, recall, and f1 score

Apart from the testing process by calculating accuracy values, this research also calculated precision, recall, and f1-score values. The same is

valid for calculating accuracy. This study's precision, recall, and f1 scores were highest when hidden layer seven was used. Precision was 77.24%, recall was 72.58% and f1 score was 76.86%. All experimental results are shown in Table 4.

Table 4. precision, recall and f1 score evaluation results.

hidden layer	presisi	recall	f1 score
7	77.24%	72.58%	76.86%
2	70.55%	68.62%	72.39%
5	75.88%	71.92%	76.02%

The recall value differs from the others based on the precision, recall, and f1 score analysis results. In this case, the recall analysis is the percentage of data predicted to be positive for diabetes compared to the actual data for diabetic students. This occurs because the amount of data on the positive label (1) is not balanced with harmful data (0).

### Validation results with k-fold cross-validation

There is a difference between calculating accuracy without validation and using validation. When validating using 10-fold, the average accuracy experienced a very significant increase, especially in the hidden layer five scenarios. Before validation, the resulting accuracy was 71%, but after being validated 10-fold, the average accuracy was 77.04%. The accuracy value increased by 6%, especially in hidden layer 5. The difference in results without validation and using k-fold cross-validation is shown in Figure 6.

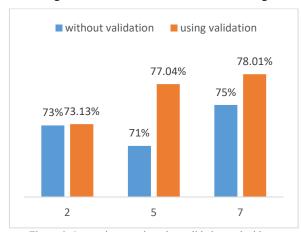


Figure 6. Comparison results using validation and without

## CONCLUSION

Based on the results of experiments that have been carried out show that determining the number of hidden layers can influence the performance of the multi-layer perceptron model in the classification of diabetes mellitus in women, where the highest accuracy value was obtained when using hidden layer 7 with an accuracy value of 75%, precision 77.24%, recall 72.58 and fl score 76.86%. Meanwhile,

determining the number of iterations cannot affect the performance of the multi-layer perceptron model, especially on the dataset used in the research. Then, the data validation process can increase the accuracy of diabetes mellitus classification. Especially in the scenario with the initialization of hidden layer 5, accuracy increased by more than 6%. Apart from that, in the future, research can be carried out to handle unbalanced data; this can be seen in the recall value, which has a very significant difference with the precision, accuracy, and F1 score values.

### REFERENCE

- [1] C. Catherine et al., Prevalence of diabetes and high risk for diabetes using A1C criteria in the US population in 1988-2006.. 2010. Diabetes Care, 33. 562-568
- [2] A. "DIABETES Ameer et al., CLASSIFICATION BASED ON KNN: IIUM *Engineering Journal.*, vol. 21, no. 1, pp. 175–181, 2020, doi: 1 0.31436/iiumej.v21i1.1206.
- [3] V. Anuja Kumari, and R.Chitra. "Classification Of Diabetes Disease Using Support Vector Machine," International Journal of Engineering Research and Applications,, vol. 3, no. 1, pp, 1797-1801. 2013.
- [4] N. Zaman, et al., "Classification of Diabetes using Machine Learning," Proc. IEEE Comput, 2022 International Conference on*Futuristic* Technologies (INCOFT), vol. 2022-November 2022, doi: 10.1109/INCOFT55651.2022.10094335. Belgaum. India
- [5] A. F. Limas, et al., "A Comparative Analysis on the Evaluation of KNN and SVM Algorithms in the Classification of Diabetes," Scientific Journal of Informatics., vol. 10, no. 3. pp, 251-26, 2023, doi: 10.15294/sji.v10i3.44269.
- [6] S. S. Chai, et al., "A Multilayer Perceptron Neural Network Model to Classify Hypertension in Adolescents Using Anthropometric Measurements: A Cross-Sectional Study in Malaysia," Sarawak, Computational Mathematical Methods in Medicine, vol. 2021, no. 2, pp. 1-11, 2021, doi: 10.1155/2021/2794888
- [7] N. F. S. Neto, et al., "A Study of Multilayer Perceptron Networks Applied to Classification of Ceramic Insulators Using Ultrasound," Applied Sciences, vol. 11, pp. 1-19, 2021, doi: 0.3390/app11041592.
- [8] A. H. Baksir, et. al., "Prediksi Tingkat Kesuburan (Fertility) Dengan Jaringan Saraf Tiruan Metode Backpropagation," JIKO (Jurnal Informatika dan Komputer), vol. 3, no. 2, pp, 107-112. 2020, doi: 10.33387/jiko.v3i2.1922
- Bhagyashree and Muralikrishna., [9] S. R. "Diagnosis of Alzheimer's Disease using Multi-Layer Perceptron Network," Proc. IEEE India Council International Subsections Conference (INDISCON), vol. 2022-July 2022, doi:

- 10.1109/INDISCON54605.2022.9862895 Bhubaneswar, India
- [10] S. Vashisth., I. Dhalland and S. Saraswat., "Chronic Kidney Disease (CKD) Diagnosis using Multi-Layer Perceptron Classifier," Proc. IEEE 10th International Conference on Cloud Computing. Data Science & Engineering (Confluence), vol. 2020-January 2022, doi: 10.1109/Confluence47617.2020.9058178. Noidia, India
- [11] M. Kukade., T. Karve T, and D. Gharpure Identification and classification of spices by machine learning. Proc. - 2019 IEEE Int. Conf. Intell. Syst. Green Technol. ICISGT 2019, pp. 1-4, 2019, doi: 10.1109/ICISGT44072.2019.00015.
- [12] F. Martinez, H. Montiel, and F. Martinez, "A Machine Learning Model for the Diagnosis of Coffee Diseases," International Journal of Advanced Computer Science and Applications, 4, 2022, 13, no. 10.14569/IJACSA.2022.01304110
- [13] F. Gorunescu, Data Mining Concepts, Models and Techniques. Chennai, India: Scientific Publishing Services Pvt. Ltd, 2011. doi: 10.1007/978-3-642-19721-5.
- [14] H. L. Gope and H. Fukai, "Peaberry and normal coffee bean classification using CNN, SVM, and KNN: Their implementation in and the limitations of Raspberry Pi 3," AIMS Agriculture and Food, vol. 7, no. 1, pp. 149-167, 2022, doi: 10.3934/agrfood.2022010.
- [15] Zhao et al., "Real-time recognition system of soybean seed full-surface defects based on deep learning," Computers and Electronics in Agriculture, vol. 187, p. 106230, Aug. 2021, doi: 10.1016/j.compag.2021.106230.